







外觀圖

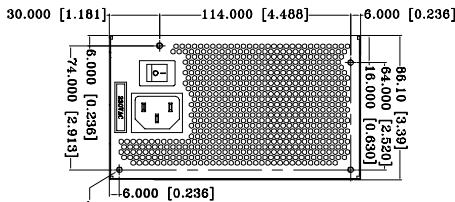

REF. ID.	PIN NO.	SIGNAL	WIRE COLOR	GAUGE	CONNECTOR TYPE	CABLE LENGTH
P1	1	+3.3VDC	ORANGE	22	NO1EX	420±18mm
	2	+3.3VDC	ORANGE	22	39-01-2240	
	3	COM	BLACK	20	or EQUIV.	
	4	+5VDC	RED	20		
	5	COM	BLACK	20		
	6	+5VDC	RED	20		
	7	COM	BLACK	20		
	8	PW_OK	GRAY	24		
	9	+5VSB	PURPLE	22		
	10	+12V	YELLOW	20		
	11	+12V	YELLOW	22		
P2	12	+3.3VDC	ORANGE	22		420±18mm
	13	+3.3VDC	ORANGE	22		
	14	+3.3VDC	BROWN	24		
	15	COM	BLUE	24		
	16	PS_ON#	GREEN	24		
	17	COM	GREEN	20		
	18	COM	BLACK	20		
	19	COM	BLACK	20		
	20	COM	BLACK	20		
	21	+5VDC	RED	20		
	22	+5VDC	RED	20		
P3	23	+5VDC	RED	20		320±18mm
	24	+5VDC	RED	20		
	1	COM	BLACK	18	NO1EX	
	2	COM	BLACK	18	39-01-2040	
	3	+12V	YELLOW	18	or EQUIV.	
	4	+12V	YELLOW	18		
	1	COM	BLACK	20	NO1EX	
	2	COM	BLACK	20	SD-67582-001	
	3	+5VDC	RED	20	or EQUIV.	
	4	COM	BLACK	20		
	5	+12V	YELLOW	20		
P4	6	COM	BLACK	20	NO1EX	155±15mm
	7	+5VDC	RED	20	SD-67582-001	
	8	COM	BLACK	20	or EQUIV.	
	9	+12V	YELLOW	20		
	1	COM	BLACK	20	NO1EX	
	2	COM	BLACK	20	SD-67582-001	
	3	+5VDC	RED	20	or EQUIV.	
	4	COM	BLACK	20		
	5	+12V	YELLOW	20		
	1	COM	BLACK	20	NO1EX	
	2	COM	BLACK	20	SD-67582-001	
P5	3	+5VDC	RED	20	or EQUIV.	155±15mm
	4	COM	BLACK	20		
	5	+12V	YELLOW	20		
	1	COM	BLACK	20	NO1EX	
	2	COM	BLACK	20	SD-67582-001	
	3	+5VDC	RED	20	or EQUIV.	
	4	COM	BLACK	20		
	5	+12V	YELLOW	20		
	1	COM	BLACK	20	NO1EX	
	2	COM	BLACK	20	SD-67582-001	
	3	+5VDC	RED	20	or EQUIV.	
P6	4	COM	BLACK	20	or EQUIV.	155±15mm
	5	+12V	YELLOW	20		
	1	COM	BLACK	20	NO1EX	
	2	COM	BLACK	20	SD-67582-001	
	3	+5VDC	RED	20	or EQUIV.	
	4	COM	BLACK	20		
	5	+12V	YELLOW	20		
	1	COM	BLACK	20	NO1EX	
	2	COM	BLACK	20	SD-67582-001	
	3	+5VDC	RED	20	or EQUIV.	
	4	COM	BLACK	20		
P7	5	+12V	YELLOW	20		155±15mm
	1	COM	BLACK	20	NO1EX	
	2	COM	BLACK	20	SD-67582-001	
	3	+5VDC	RED	20	or EQUIV.	
	4	COM	BLACK	20		
	5	+12V	YELLOW	20		
	1	COM	BLACK	20	NO1EX	
	2	COM	BLACK	20	SD-67582-001	
	3	+5VDC	RED	20	or EQUIV.	
	4	COM	BLACK	20		
	5	+12V	YELLOW	20		
P8	6	COM	BLACK	18	WST	420±18mm
	7	+12V	YELLOW	18	PE-142002BK5	
	8	COM	BLACK	18	or EQUIV.	
	9	+12V	YELLOW	18		
	1	COM	BLACK	20	WST	
	2	+12V	YELLOW	20	PE-142002BK5	
	3	+12V	YELLOW	20	or EQUIV.	
	4	COM	BLACK	20		
	5	COM	BLACK	20		
	6	COM	BLACK	20		
	7	+12V	YELLOW	20		
P9	8	COM	BLACK	18	WST	80±15mm
	9	+12V	YELLOW	18	PE-142002BK5	
	1	COM	BLACK	20	or EQUIV.	
	2	+12V	YELLOW	20		
	3	+12V	YELLOW	20		
	4	COM	BLACK	20		
	5	COM	BLACK	20		
	6	COM	BLACK	20		
	7	+12V	YELLOW	20		
	8	COM	BLACK	18	WST	
	9	+12V	YELLOW	18	PE-142002BK5	
P10	1	COM	BLACK	20	or EQUIV.	155±15mm
	2	+12V	YELLOW	20		
	3	+12V	YELLOW	20		
	4	COM	BLACK	20		
	5	COM	BLACK	20		
	6	COM	BLACK	20		
	7	+12V	YELLOW	20		
	8	COM	BLACK	18	WST	
	9	+12V	YELLOW	18	PE-142002BK5	
	1	COM	BLACK	20	or EQUIV.	
	2	+12V	YELLOW	20		
P11	3	+12V	YELLOW	20		80±15mm
	4	COM	BLACK	20		
	5	COM	BLACK	20		
	6	COM	BLACK	20		
	7	+12V	YELLOW	20		
	8	COM	BLACK	18	WST	
	9	+12V	YELLOW	18	PE-142002BK5	
	1	COM	BLACK	20	or EQUIV.	
	2	+12V	YELLOW	20		
	3	+12V	YELLOW	20		
	4	COM	BLACK	20		

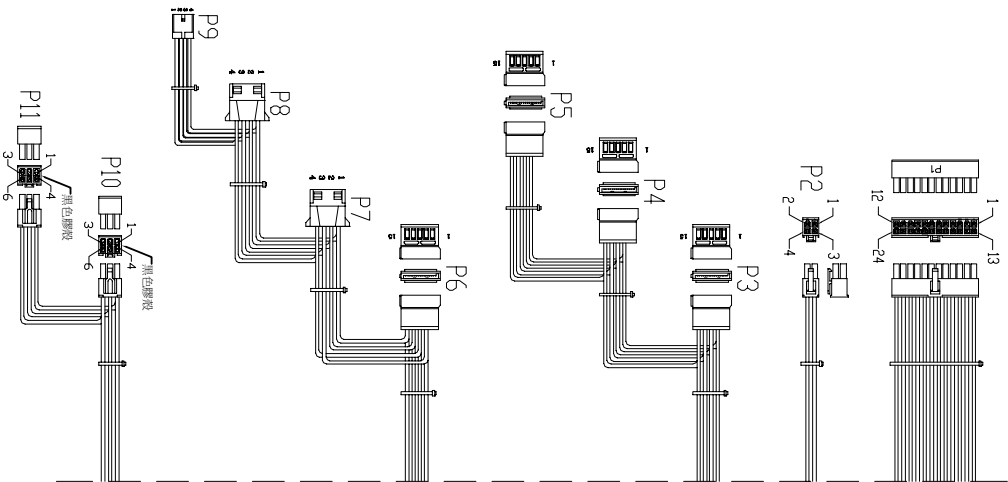

- NOTES:
1. ALL THE LENGTH OF OUTPUT WIRES EXCLUDE HOUSING.
 2. 產地標籤依業務指示加貼.
 3. 公差: .XX=±0.5 [0.02]、.XXX=±0.25 [0.01].

UNIT:mm [inch]

MODEL NO.:SP400-A,IEC62368,(F040001)		TITLE:ASSY		SHEET: 1 OF 1 REV:0.	
R&D 8		PE		DATE	
				APR.2.2020	

P/N.:9PA350DM00